
Decision Document for Soil and Groundwater at the Old Fire Training Area, Site 1

144TH FIGHTER WING CALIFORNIA AIR NATIONAL GUARD FRESNO AIR TERMINAL, FRESNO, CALIFORNIA

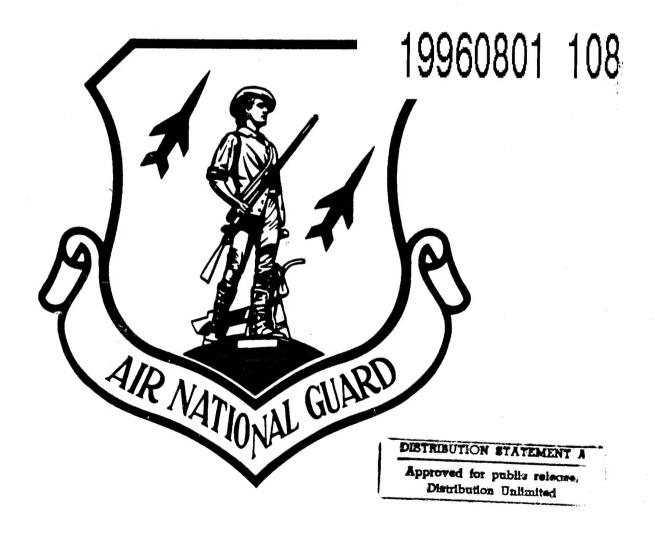

HAZWRAP SUPPORT CONTRACTOR OFFICE

Oak Ridge, Tennessee 37831
Operated by MARTIN MARIETTA ENERGY SYSTEMS, INC.
For the U.S. DEPARTMENT OF ENERGY under contract DE-AC05-840R21400

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and meintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE January 1996	3. REPORT TYPE AND NO Further Act	O DATES COVERED
4. TITLE AND SUBTITLE			S. FUNDING NUMBERS
Decision Document for IRP Site 144th Fighter Wing, Fresno Air			
6. AUTHOR(S)			
NA			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)			8. PERFORMING ORGANIZATION REPORT NUMBER
IT Corporation 312 Directors Drive			
Knoxville, Tennessee 37923		A GR	The second color bear was wrond The second CVS AD RELECTE
9. SPONSORING/MONITORING AGENCY HAZWRAP/Martin Marietta End for ANG/CEVR	NAME(S) AND ADDRESS(ES ergy Systems, Inc		10. SPONSORING/MONITORING AGENCY REPORT NUMBER
ANG/CEVR			The Maria Maria 1988
3500 Fetchet Avenue Andrews AFB MD 20762-5157	·	man Arrayan a denina a serena a se	
11. SUPPLEMENTARY NOTES			
an and an angle from the control of	Tipone in an analysis in the	and the second of the second o	
12a. DISTRIBUTION/AVAILABILITY STAT	TEMENT .		12b. DISTRIBUTION CODE
Approved for public release; distribution is unlimited			STATES OF THE ST
13. ABSTRACT (Maximum 200 words)		<u> </u>	**************************************
Decision Document for IRP Site	No. 1- Old Fire Training nal, Fresno, California. ' o Further Remedial Actio	Area, California Air This report document on Planned decision a	s the data, conclusion, and
	9, p. 10 11 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	· · · · · · · · · · · · · · · · · · ·	and the control of th
All business of the most settler to the transfer		9	; v f
STATES SENS	erage of the second of the sec	The same and the s	
	. Primite in the second second	The second secon	722 (195 19 SING BY 1996)
	Magnes as the con-		E MERCENTE TREATMENT ARVEY
14. SUBJECT TERMS Installation Restoration Program Compensation and Liability Act California Air National Guard; H	(CERCLA); Air National		ation, 16. PRICE CODE
	SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFIC OF ABSTRACT	CATION 20. LIMITATION OF ABSTRACT
Uncassified	Unclassified	Unclassified	None

NSN 7540-01-280-5500 DTIC QUALITY IN THE PROPERTY L

Standard Form 298 (Rev. 2-89)

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to stay within the lines to meet optical scanning requirements.

- Block 1. Agency Use Only (Leave blank).
- **Block 2.** Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.
- State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 30 Jun 88).
- Block 4. <u>Title and Subtitle</u>. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.
- Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract

PR - Project

G - Grant

TA - Task

PE - Program

Element

WU - Work Unit Accession No.

Block 6. <u>Author(s)</u>. Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

- **Block 7.** <u>Performing Organization Name(s) and Address(es)</u>. Self-explanatory.
- Block 8. <u>Performing Organization Report</u>
 <u>Number</u>. Enter the unique alphanumeric report
 number(s) assigned by the organization
 performing the report.
- **Block 9.** Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.
- **Block 10.** Sponsoring/Monitoring Agency Report Number. (If known)
- **Block 11.** Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in.... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. <u>Distribution/Availability Statement</u>. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."

DOE - See authorities.

NASA - See Handbook NHB 2200.2.

NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.

 DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.

NASA - Leave blank. NTIS - Leave blank.

- Block 13. Abstract. Include a brief (Maximum 200 words) factual summary of the most significant information contained in the report.
- Block 14. <u>Subject Terms</u>. Keywords or phrases identifying major subjects in the report.
- Block 15. <u>Number of Pages</u>. Enter the total number of pages.
- Block 16. <u>Price Code</u>. Enter appropriate price code (NTIS only).
- Blocks 17. 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.
- Block 20. <u>Limitation of Abstract</u>. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

Draft Decision Document for Soil and Groundwater at the Old Fire Training Area, Site 1 144th Fighter Wing, California Air National Guard Fresno Air Terminal Fresno, California

Submitted to:

Air National Guard Readiness Center Andrews Air Force Base, Maryland

Prepared by:

IT Corporation 312 Directors Drive Knoxville, Tennessee 37923

Submitted by:

Hazardous Waste Remedial Actions Program Martin Marietta Energy Systems, Inc. P.O. Box 2002 Oak Ridge, Tennessee 37831-6501

Prepared for:

U.S. Department of Energy Contract DE-AC05-840R21400

January 1996

Document Purchasing Notice

Copies of this report may be purchased from:

National Technical Information Service 5285 Port Royal Road Springfield, VA 22161

Federal Government agencies and their contractors registered with the Defense Technical Information Center should direct copies of this report to:

Defense Technical Information Center Cameron Station Alexandria, VA 22304-6155

Table of Contents_____

1.0 Introduction	1-1
	1-1
1.1 Purpose	1-1
1.2 Location	
1.3 Environmental Setting	1-1
1.3.1 Climate	
1.3.2 Geology	
1.3.3 Hydrogeology	
2.0 Background	
2.1 Site History	
2.2 Investigation Results	
2.2.1 Soil Sampling Results	
2.2.2 Groundwater Sampling Results	
2.3 Risk Assessment Summary	
2.3.1 Risks Associated with Site Soils	
2.3.2 Risks Associated with Groundwater	
3.0 Conclusions	
4.0 Recommendations	
5.0 References	

List of Figures_____

Figure	Title	Follows Page
1	Base Map Location of Identified Investigation Sites	1-1
2	Soil Boring and Monitoring Well Locations of Site No. 1	2-2

1.0 Introduction

This decision document (DD) for Site 1 - the Old Fire Training Area (FTA) at the California Air National Guard (ANG) Base, Fresno, California (the Base), is being submitted under the requirements of the U.S. Department of Defense Installation Restoration Program (IRP) and the Comprehensive Environmental Response, Compensation, and Liability Act, as amended by Superfund Amendments and Reauthorization Act.

1.1 Purpose

The objective of this DD is to provide technical rationale to support no further action at Site 1. Implementation of this recommended alternative would preclude any future remedial investigation/feasibility study (RI/FS) activities at the site.

Site 1 has been determined to pose no significant threat to public health or the surrounding environment based on evaluations of possible source areas, sampling data, pathways, and contaminant receptors. The information presented herein is a synopsis of activities and results of various stages of investigative work. Detailed evidence on which the decision for no further action is based can be found in its entirety in the Site Investigation (SI) Report, (IT Corporation [IT], 1992) and the Remedial Investigation Report, (IT, 1996).

1.2 Location


The California ANG leases approximately 140 acres of land from the City of Fresno on three different parcels inside the Fresno Air Terminal boundaries (Figure 1). Site 1 is in the Northeast portion of parcel A in the Southeast portion of the Terminal. The location of Site 1 at the Fresno Air Terminal is shown on Figure 1.

1.3 Environmental Setting

To better understand the rationale for the no further action decision at Site 1, the following paragraphs describe the environmental setting and possible migration potential in the vicinity of the site.


1.3.1 Climate


The climate is characterized by hot, dry summers and cool, moist winters. Mean monthly temperatures range from 46°F in December to 85°F in July. Winds are generally from the northwest. The average annual precipitation is less than 10 inches in the Fresno area. More than 90 percent of the yearly precipitation occurs between October and April. Yearly rainfall

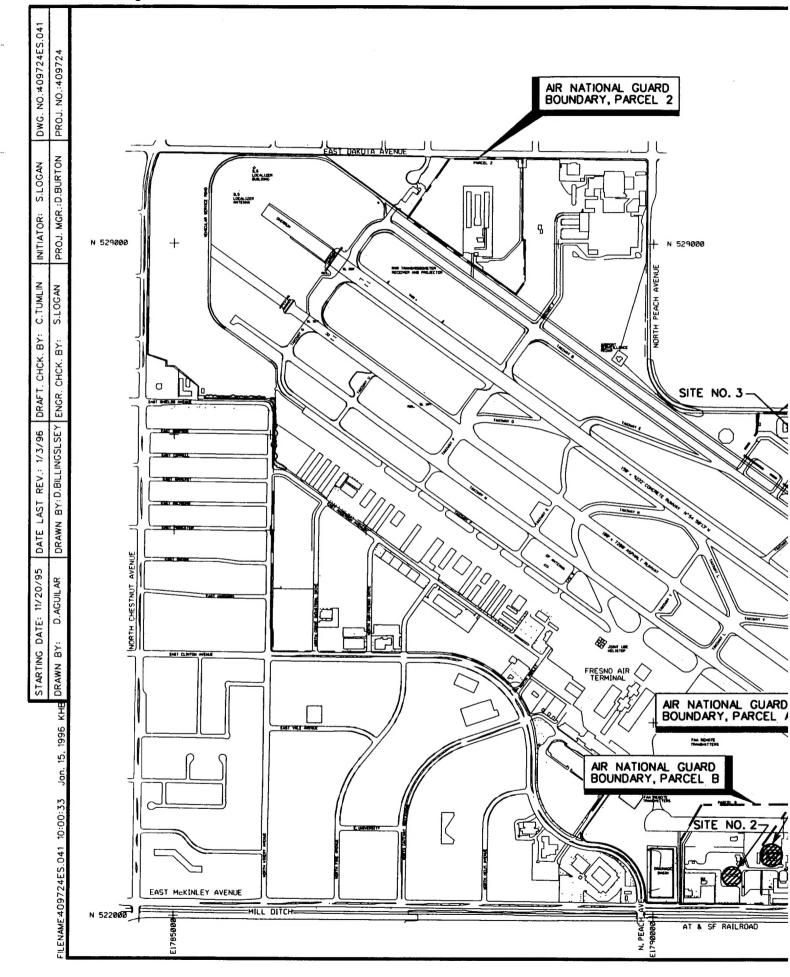

LEGEND:

PROPERTY BOUNDARY



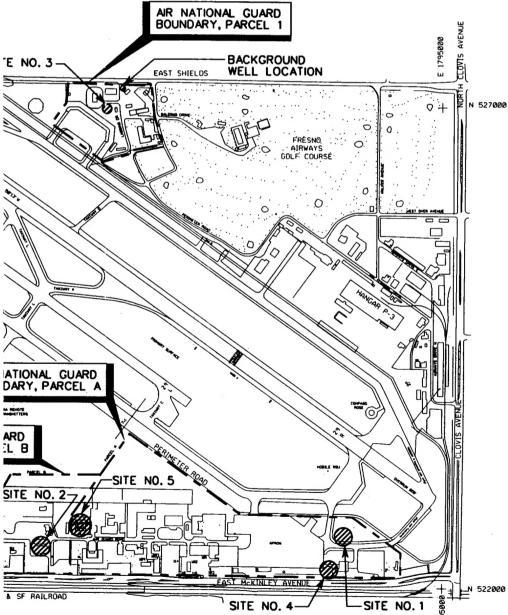




FIGURE 1 BASE MAP LOCATION OF IDENTIFIED INVESTIGATION SITES

CALIFORNIA AIR NATIONAL GUARD FRESNO AIR TERMINAL FRESNO, CALIFORNIA





_EGEND:

PROPERTY BOUNDARY




FIGURE 1
BASE MAP LOCATION OF IDENTIFIED INVESTIGATION SITES

CALIFORNIA AIR NATIONAL GUARD FRESNO AIR TERMINAL FRESNO, CALIFORNIA



varies widely from year to year and shows long-term wet and dry periods. The mean evaporation rate is 66 inches per year.

1.3.2 Geology

At the Base, the geology is characterized by alluvial fan deposits (Cehrs, et al., 1979). The fans have a low surface relief with very gentle gradients. Deposits in these fans are associated with an alluvial flood plain regime. Sediments in the fans range from clays to gravel, with finer sediments (silts and clays) associated with overbank and flood plain deposits, and coarser sediments (sands and gravels) associated with levee, crevasse splay, channel lag, and point bar deposits.

1.3.3 Hydrogeology

In the Fresno area, all municipal and rural domestic water is pumped from the alluvial aquifers. The aquifer system has been described as unconfined or semiconfined depending on local hydrogeologic conditions (Cehrs, et al., 1979; Steele, 1986). At the Base, the water table is approximately 80 feet below ground surface (bgs), sloping generally to the southwest. Groundwater flow through the alluvial sediments comprising the aquifer system beneath the Fresno area is controlled by the slope of the water table (to the southwest) and the occurrence of coarse-grained sediments within the alluvial fans. In the Fresno area, groundwater flows generally to the southwest and preferentially through coarse-grained channel deposits.

2.0 Background

The Air National Guard Readiness Center (ANGRC) instituted a comprehensive IRP to assess the extent of suspected chemical contamination that may have resulted from past handling and disposal practices at the Base. The ANGRC designed the IRP to generate data of sufficient quality during a SI that will support one or more of the following recommendations:

- Generate a DD recommending no further action
- Initiate a focused feasibility study/remedial measure
- Implement a remedial response
- Initiate a RI/FS.

Results of the investigation programs at Site 1 indicate that no further action is warranted at this site. General supporting information is presented in the following sections.

2.1 Site History

In April 1988, a preliminary assessment (PA) was completed by the Hazardous Material Technical Center (HMTC) (1988), focusing on past and present generation, use, handling, and disposal practices of hazardous waste and materials. Based on HMTC's findings, three suspect sites potentially contaminated with hazardous waste/hazardous materials were identified and were recommended for further IRP investigation. One such identified site included Site 1, The Old FTA.

Site 1 consisted of an unlined earthen berm surrounding a mock airplane and was used for Base fire training exercises from the late 1950s to the early 1970s. Materials that were burned for exercises included jet petroleum grade 4 (JP-4), aviation gas/fuel (AVGAS), and used petroleum, oil, and lubricants (POL) from Base shops. The approximate location of the FTA is in the U-shaped area formed by the taxiway, perimeter road, and the vehicular access area north of the hot brake area. The site was abandoned, covered with 3 to 4 feet of fill material, and subsequently graded.

After igniting the JP-4, AVGAS, and POL for fire training, the flames were allowed to burn until they began to die down. The flames were extinguished with a protein-based foam consisting of approximately 6 percent aqueous film-forming foam and 94 percent water. Sodium bicarbonate, also referred to as Purple K, was used as a dry chemical extinguisher. It was estimated that between 500 and 1,000 gallons of flammable material was used each month at the site.

2.2 Investigation Results

In 1990, an SI was conducted to confirm or deny the presence of contamination; to identify the presence and concentrations of specific chemical contaminants in both soil and in the uppermost water-bearing unit; to assess the geologic, hydrogeologic, and geochemical conditions at Site 1. Seventeen soil borings were drilled from which 52 soil samples were collected and analyzed for total petroleum hydrocarbons (TPH) (diesel fractions only), volatile organic compounds (VOC), total lead, and total organic lead.


Data from three piezometers installed at Site 1 were used to construct preliminary ground-water contour maps and establish flow directions. Based on the flow direction, two monitoring wells were located hydraulically downgradient and one monitoring well was placed hydraulically upgradient of the site. Six groundwater samples were collected from these wells over a period from November 1990 to May 1993. Rationale and methodologies for the investigation were developed in the SI sampling and analysis plan for the Base (IT, 1990). Figure 2 shows the placement of the soil borings and monitoring wells. Comprehensive investigation information and results are incorporated in the SI Report (IT, 1992).

2.2.1 Soil Sampling Results

A total of 17 soil borings were installed at Site 1, from which 52 soil samples were collected. The initial nine borings were sampled to depths ranging from 50 to 60 feet bgs. Due to the absence of contamination below 40 feet, as indicated by the first nine borings, the final eight borings were targeted for total depths of 40 feet.

Analytical data discussed in this DD has been filtered through a process known as "blank correction," where field sample results are compared to results from quality control (QC) samples such as laboratory method blanks, equipment rinsate samples, etc. When analytes are found in both QC and field samples at similar concentrations, then the results from the field samples are attributed to contamination from sampling or laboratory procedures, and are not considered to represent site-related contamination. Because of the blank correction process, discussions of data results in this DD may not contain the exact data as listed in previous reports (such as IT, 1992 or IT, 1993). Comprehensive data summaries for Site 1 soil and groundwater samples are contained in the Remedial Investigation report (IT, 1996) as is a more detailed discussion of the blank correction process.

Of the samples collected at Site 1, six different volatile compounds were positively detected in the soil samples: 2-butanone, 4-methyl-2-pentanone, acetone, ethyl benzene, methylene

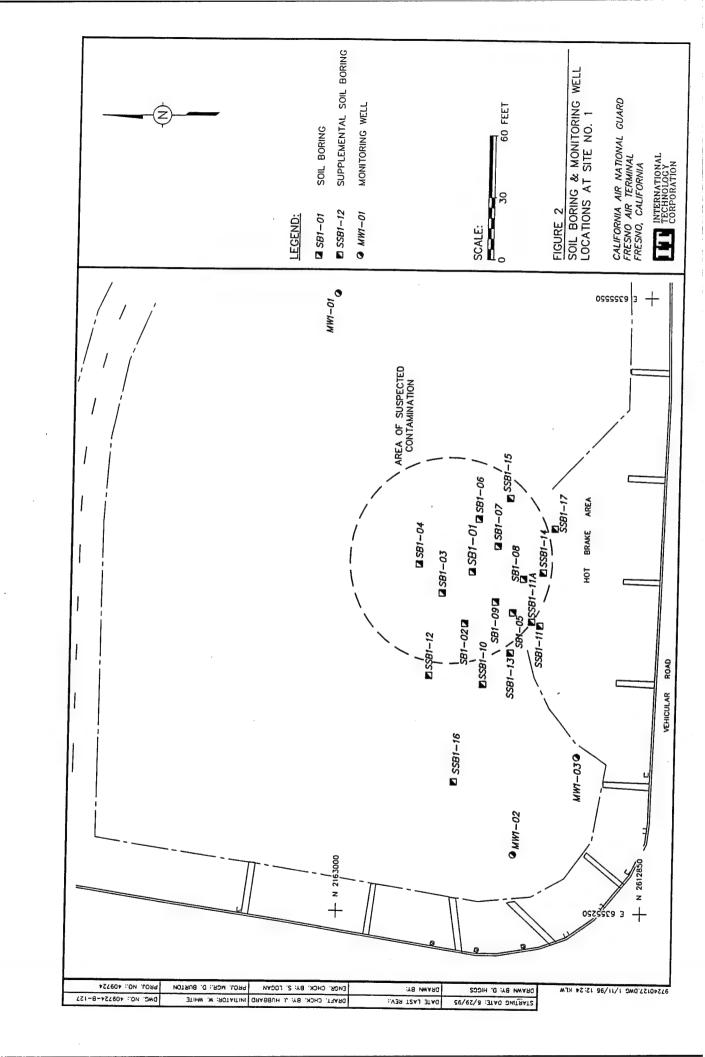

chloride, and total xylenes. The VOCs were found in soil borings SB1-01, -05, -07, -08, -09, SSB1-11, -15, and -17.

The compound 2-butanone was reported in three samples collected at SB1-01. Concentrations ranged from an estimated 190 to 250 micrograms per kilogram (µg/kg) at depth intervals above 26.5 feet.

4-Methyl-2-pentanone was detected in 2 samples from boring SB1-01. Concentrations ranged from an estimated 34 to 71 μ g/kg at depth intervals above 26.5 feet.

Acetone was reported in a total of 6 samples from three soil borings. The concentrations ranged from 220 to 1,800 μ g/kg to depths no greater than 26.5 feet. Detected concentrations of acetone are below the residential preliminary remediation goal (PRG) of 2.9 x 10⁶ μ g/kg.

Ethyl benzene was reported in a single sample at a concentration of 4,600 μ g/kg. This concentration is below the PRG of 2.9 x 10^6 μ g/kg.

Methylene chloride was reported in two borings at concentrations ranging from 33 to 51 μ g/kg from depths no greater than 25 feet bgs.

Total xylenes were found at elevated levels in the same samples that had toluene, but at higher concentrations in all cases. The concentrations ranged from 940 to $38,000~\mu g/kg$ at depths no greater than 20 feet bgs and as shallow as 4 feet bgs. The $980,000~\mu g/kg$ PRG for xylenes was not exceeded in any sample.

TPH (diesel) was detected with reportable concentrations in three borings at Site 1. The concentrations of TPH are all estimated. Levels of TPH (diesel) range from 1,530 to 3,500 milligrams per kilogram (mg/kg) from depths no greater than 20 feet bgs.

Soil samples collected from the 17 borings installed at Site 1 were submitted for analysis of total lead and organic lead. Total lead was detected in several samples from Site 1; however, concentrations did not exceed the level of 20 mg/kg indicated by the U.S. Geological Survey (1984) as being typical for the region. Each of these results is below the California PRG of 130 mg/kg for lead.

Organic lead was not detected in any Site 1 soil samples.

2.2.3 Groundwater Sampling Results

Three monitoring wells were installed (one upgradient and two downgradient) as part of the investigation to monitor groundwater quality from the uppermost water-bearing zone. Six groundwater samples were collected from the three wells over the monitoring history. Samples were collected in November 1990, February 1991, June 1992, October 1992, January 1993 and May 1993.

Groundwater samples collected from Site 1 were analyzed for VOCs, TPH (diesel), and total lead. Total lead and TPH (diesel) were dropped from the analytical suite after the June 1992 sampling event due to a lack of positive detections. No organic compounds that were detected in Site 1 soil was detected in groundwater samples collected from the three Site 1 monitoring wells.

The only organic compound positively reported in any of the analytical tests performed was trichloroethene (TCE). TCE was detected in MW1-01 at a concentration of 0.7 micrograms per liter (μ g/L) in June 1992. TCE was detected in MW1-02 on three different sampling events. The presence of TCE is assumed to be due to regional groundwater contamination associated with past activities at Hammer Field/Fresno Air Terminal.

Lead, the only inorganic compound analyzed at Site 1, was detected at an estimated concentration only from MW1-02 at 1.1 μg/L during the November 1991 sampling event. This concentration of lead is below the 15 μg/L as specified in the U.S. Environmental Protection Agency's (EPA) maximum contaminant levels (MCL) for drinking water.

2.3 Risk Assessment Summary

A baseline risk assessment was conducted to quantify the risk to human receptors that may occur at Site 1 under various scenarios if no remedial actions are taken. A summary of findings from this evaluation are included in the following sections. A preliminary hazard evaluation for Site 1 is included in the SI report (IT, 1992) and a baseline risk assessment is included in Appendix J to the RI Report (IT, 1996).

Risks of exposure to chemicals of concern (COC) identified in Site 1 media were quantified for existing and predicted land use conditions. Exposure pathways evaluated for soils included incidental soil ingestion, dermal contact with soil and inhalation of dust from surface soils. For groundwater, exposure routes included ingestion, dermal contact and inhalation of

volatiles during household water use. A complete explanation of risk evaluation methods and selection of COCs is included in the RI Report (IT, 1996).

2.3.1 Risks Associated with Site Soils

A cumulative sum of the cancer and noncancer risks for the identified exposure pathways and chemicals detected at Site 1 exhibit risks below the target cancer range of 10⁻⁶ to 10⁻⁴, and noncancer risks below the hazard index (HI) target of one.

Chemicals of potential concern (COPC) have been identified in the soils at Site 1 and were evaluated separately from chemicals detected in deeper layers of soil. Chemicals found within a depth of 3 feet from the surface (referred to as surface soil) were identified as COPCs for direct contact pathways.

Shallow soil samples (less than 3-foot depth) from Site 1 were found to contain lead and TPH (diesel). A cumulative sum of the cancer risk and Hazard Quotient for each of these pathways and chemicals observed at Site 1 exhibits a cancer risk below the target range of 10^{-6} to 10^{-4} , and all noncancer risk HI estimates below the target of one (1).

A simplistic leaching model was also used to conservatively estimate potential impacts to groundwater from organic contaminants in soil. Only methylene chloride found in the soils at Site 1, should it leach, might possibly produce concentrations slightly above the regulatory MCL of 5 μ g/L for groundwater. It is recognized that methylene chloride is a common laboratory contaminant and that the low levels detected in soil (51 μ g/kg) may be an artifact of the analytical procedures.

2.3.2 Risks Associated with Groundwater

Exposure risks for groundwater were evaluated for both those chemicals detected in Site 1 groundwater and for chemicals that may leach from the overlying soil. All cancer risk estimates for each exposure scenario were below the target risk range of 10^{-6} to 10^{-4} . No onsite receptor is above the total cancer risk across pathways or exceeded the upper limit of the target range (10^{-4}). Estimates for on-site receptor exposure were also below target levels. The sum of the risk from potential future groundwater conditions is at the lower range of the cancer target value of 10^{-6} .

TCE was the only organic compound reported in the groundwater at a concentration slightly above its detection limit. TCE is associated with regional groundwater contamination at the Fresno Air Terminal, and is not due to past site-related activities (ERM, 1994).

Lead was the only inorganic compound analyzed for and detected in Site 1 groundwater. It was estimated in only one sample between November 1990 to May 1993 at 1.1 μ g/L from MW1-02, which is below the EPA's MCL for drinking water.

Due to the lack of significant and widespread concentrations of organic or inorganic constituents in the soil, and the lack of any chemicals in the groundwater, Site 1 does not present a threat to human health or the environment based on this evaluation.

3.0 Conclusions

Environmental sampling activities at Site 1 have confirmed limited contamination associated with past use of the fire training area. Chemicals detected in soil samples consist of high-boiling fuel hydrocarbons, xylenes, and other VOCs. Lead concentrations of 18.5 mg/kg were detected; however, this is below the threshold for health-based risk concentrations for lead. Risks evaluated for applicable and predicted exposure routes for chemicals detected in soil indicate that Site 1 does not pose a threat to human health or the environment.

Groundwater samples that have been collected indicate that the local groundwater conditions have not been adversely impacted by activities at Site 1 and there has been no significant difference observed between upgradient and downgradient conditions.

4.0 Recommendations

Based on investigation sampling results and risk quantification, it is recommended that Site 1 be removed from any further investigation, sampling, or risk-based analytical activities.

The ANGRC has reviewed the available data and recommends no further action under the IRP at Site 1, Old Fire Training Area, Fresno ANG Base.

DAVID C. VAN GASBECK

Chief, Environmental Division

Civil Engineer Directorate

5.0 References

California Department of Water Resources, 1987, Lines of Equal Elevation of Water in Wells, Unconfined Aquifer, San Joaquin Valley, Spring 1987, Map Constructed by State of California, Department of Water Resources, San Joaquin District.

Cehrs, D., S. Soente, W. C. Bianchi, 1979, A Geological Approach to Artificial Recharge Site Selection in the Fresno-Clovis Area, California, U.S. Department of Agriculture, Technical Bulletin No. 1604, 73 pp.

ERM-West, Inc. (ERM), 1994, Draft Engineering Evaluation/Cost Analysis for the Well 70 Interim Action Study, Old Hammer Field, California. City of Fresno, California.

Hazardous Materials Technical Center (HMTC), 1988, Preliminary Assessment, 144th Fighter Interceptor Wing, California Air National Guard, Fresno Air Terminal, Fresno, California, April 1988.

IT Corporation (IT), 1990, Site Investigation Sampling and Analysis Plan, California Air National Guard, Fresno Air Terminal, Fresno, California.

IT Corporation (IT), 1992, Site Investigation Report for the 144th Fighter Interceptor Wing, California Air National Guard, Fresno Air Terminal, Fresno, California, February 1992.

IT Corporation (IT), 1993, Quarterly Groundwater Monitoring Report for the 144th Fighter Interceptor Wing, California Air National Guard, Fresno Air Terminal, Fresno, California, April 1993.

IT Corporation (IT), 1996, Remedial Investigation Report, California Air National Guard, Fresno, California.

Steele, A., 1986, Aquifer Restoration: Southeast Regional Disposal Site, Fresno County, California, unpublished Master's thesis, Fresno State University.

U.S. Geological Survey (USGS), 1984, <u>Element Concentrations in Soils and Other Surficial</u>
<u>Materials of the Conterminous United States</u>, U.S.G.S. Professional Paper 1270, United States Government Printing Office, Washington, D.C.